

Adapter

SMA

Up to 18 GHz
RoHS Compliant



Specifications

Electrical

Frequency Range | DC-18 | GHz

Contact Resistance

Center Contacts | 2mΩ | max.
Outer Contacts | 2mΩ | max.

Voltage Rating | 750 | V rms

Impedance | 50 | Ohms

VSWR | 1.22 | max.


Operating Temp Range | -65 to ~165 | °C

Mechanical

Connector | SMA-plug – SMA plug |

Model Number

| TTE-191550-A-m/m |

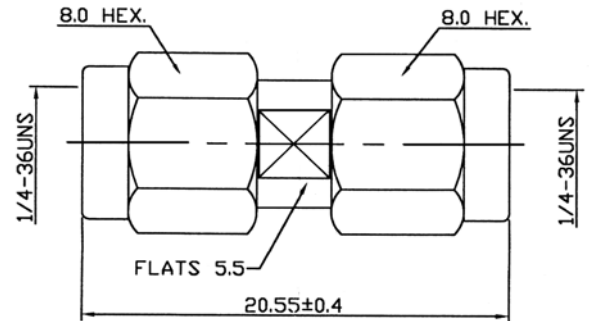

Notes:

Subject to change without notice
All dimensions in inches

09 | 2009