

Attenuators

N

DC–2.5 GHz
2 Watts



Specifications

Electrical

Frequency Range | DC–2.5 | GHz

Standard dB Values | 0–10, 12, 15, 20, 30 | dB
in 1dB increments

Attenuation Accuracy

0–6 dB	±0.3	dB
7–20 dB	±0.5	dB
21–30 dB	±0.75	dB

VSWR | 1.25:1 | Max.

Input Power | 2Watts Avg. @25°C |
Derated linearly to 0.5 Watts
@125°C

Peak Power | 250 | Watts
Max.

Impedance | 50 | Ohms

Operating Temp. Range | -65 to +125 | °C

Mechanical


RF Connectors | N |

Connectors | Nickel Plated Brass |

Conductors | Gold Plated Beryllium
Copper |

Model Number

2.5N-xx-2

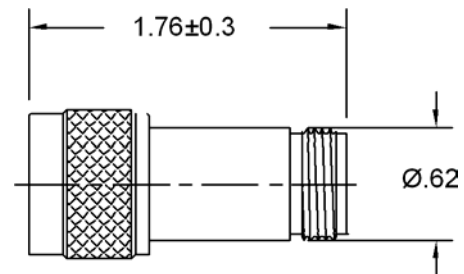

Notes:

Subject to change without notice
Dimensions are in inches

08 | 2006